



|                          |                                 |
|--------------------------|---------------------------------|
| Product designation      | Miniature circuit breaker (MCB) |
| Product type designation | P1 MB                           |
| Number of poles          | 2P                              |
| Number of DIN modules    | 2                               |
| Compliance               | IEC / UL1077                    |

### Electrical features

|   |        |         |
|---|--------|---------|
| Rated insulation voltage $U_i$ IEC/EN     | V      | 440     |
| Rated impulse withstand voltage $U_{imp}$ | kV     | 4       |
| Rated operational voltage AC (IEC)        | VAC    | 230/400 |
| Rated operational voltage DC              | VDC    | 125     |
| Rated frequency                           | Hz     | 50/60   |
| Rated current ( $I_n$ )                   | A      | 10      |
| Tripping curve                            |        | B       |
| Short circuit rating (IEC)                | kA     | 10      |
| Limiting class                            |        | 3       |
| Electrical life                           | cycles | 10000   |
| Power dissipation per pole max            | W      | 1.25    |

### Ambient conditions


|                       |     |    |      |
|-----------------------|-----|----|------|
| Operating temperature | min | °C | -40  |
|                       | max | °C | +70  |
| Storage temperature   | min | °C | -40  |
|                       | max | °C | +80  |
| Max altitude          |     | m  | 2000 |

### Mechanical features


|                                 |           |               |                 |    |
|---------------------------------|-----------|---------------|-----------------|----|
| Operating position              | normal    | Vertical plan |                 |    |
| Fixing                          |           | 35mm DIN rail |                 |    |
| Tightening torque for terminals | min       | Nm            | 1.8             |    |
|                                 | max       | Nm            | 2               |    |
|                                 | min       | lbin          | 16              |    |
|                                 | max       | lbin          | 17.7            |    |
| Terminals tool                  |           | Pz 2          |                 |    |
| Conductor section               | IEC       | min           | mm <sup>2</sup> | 1  |
|                                 |           | max           | mm <sup>2</sup> | 35 |
|                                 | AWG/Kcmil | min           |                 | 14 |
|                                 |           | max           | kcmil           | 6  |
| Mechanical life                 |           | cycles        | 20000           |    |
| Weight                          |           | g             | 230             |    |

|  |       |
|--|-------|
| Frontal IP degree  | IP20  |
| Pollution degree   | 2     |
| Grid distance as per Annex H.1 of IEC/EN60898-1 standard | mm 60 |

**Dimensions**

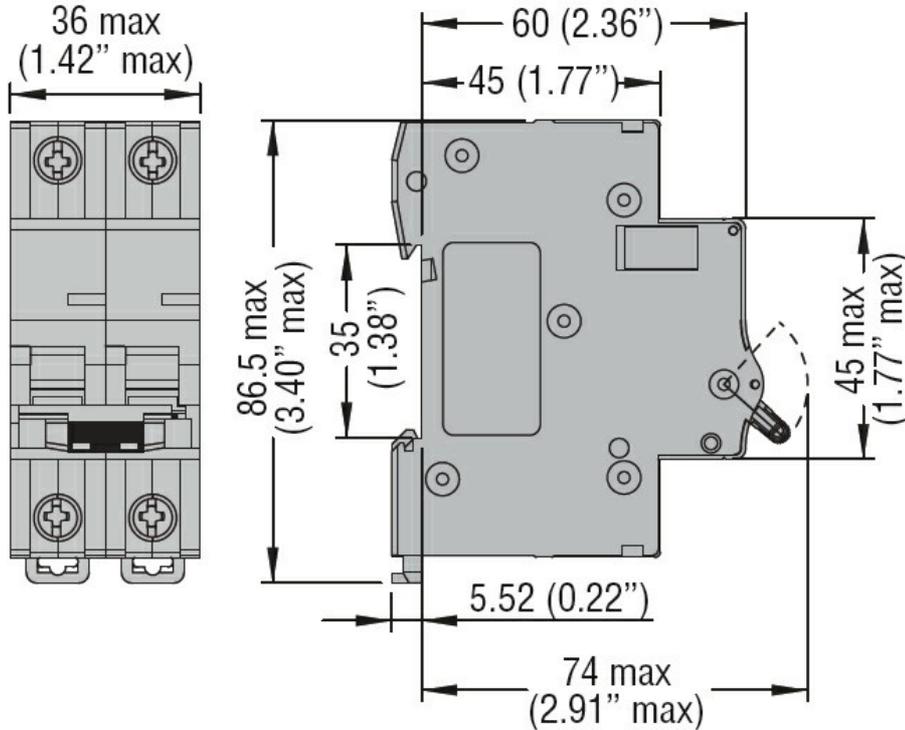

**Wiring diagrams**



**Certifications and compliance**

**Compliance**

CSA C22.2 n°235. UR "UL Recognized" per Canada e USA.

IEC/EN 60898-1

IEC/EN 60947-2

UL 1077

**Certifications**

cURus

EAC

TÜV-Rheinland

**ETIM classification**

ETIM 8.0

EC000042 -  
Miniature circuit  
breaker (MCB)